


# BENOMIC PIPE RAIL TROLLEY



## The BENOMIC series is equipped with the following as standard:

- 2 full 24 V/117 AH traction batteries.
- Modern driving arrangements infinitely variable from 0-60 m/h per minute.
- Battery indicationmeter.
- Simple lateral movement with one push of the button.
- Fast lifting and lowering of the platform.
- Electronically adjusted against abrupt pulling out and braking.
- Simple control in the platform or control lever.
- Bottom scissor control for maintenance work.
- Slide Meto option and can, therefore, be used as a spraying unit.
- Strong and fast 0.37 kW drive motor.
- Simple installation of the bottom releaser or crate sliding rack.
- All as a welded steel structure that is indestructible.
- Strong and mechanical structure of the scissors.
- All power-coated for many years of protection.
- All piperailsizes can be supplied.
- Always safe when going down due to hose breaking protection and emergency lowering valve.
- Integrated tilt detection as standard.
- Always provided with an original CE declaration.

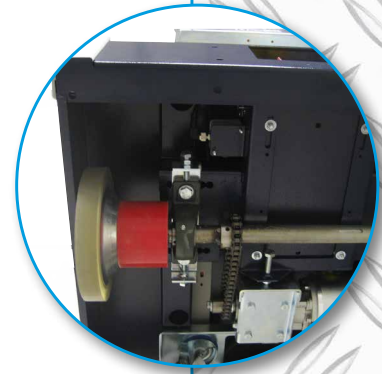

## Technical specifications \*

### Properties

- 2 scissors
- 3 scissors
- 4 scissors

### Height

- Up to 3 m height
- Up to 3.5/4.4 m height
- Up to 5.7 m height

\* Changes reserved



Jan v.d. Laarweg 1  
2678 LH De Lier - Holland  
T. +31 (0)174 - 510 266  
F. +31 (0)174 - 518 326  
E. [info@steenks-service.nl](mailto:info@steenks-service.nl)  
I. [www.steenks-service.nl](http://www.steenks-service.nl)



new



used



rental



purchase and  
sale



maintenance



service