




The corners application is fast and precise.  
It can be set within many different programs  
which enable to adapt the strapping to the product.

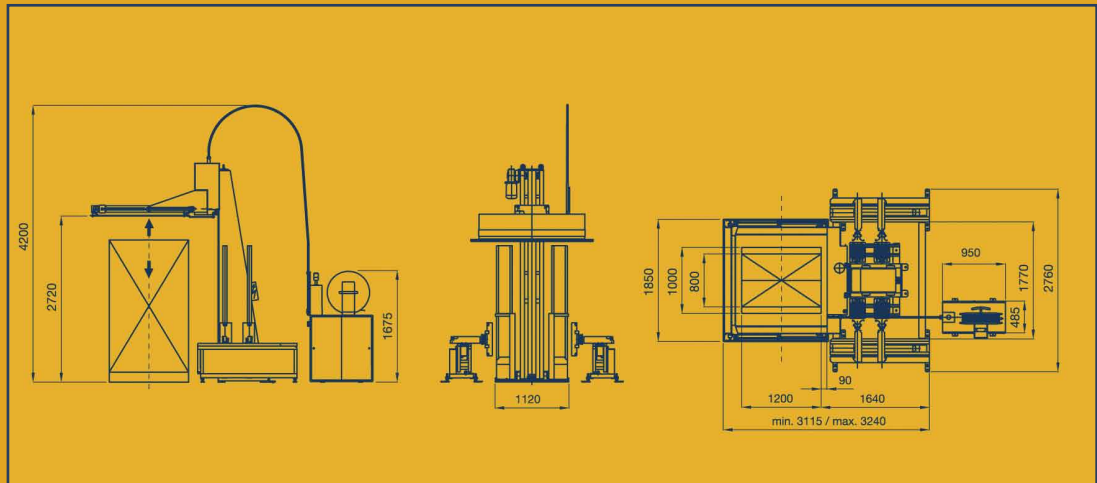

### CHARACTERISTICS

Voltage	220 V / 380 V – 50/60 Hz. III-phase	Air consumption	200 ltr/min (2901-2904) - 90 ltr/min (2902)
Electric consumption	2 Kva	Dimensions of the packed machine	2901 - 2904 (3 packages): 382 x 202 x 166 cm / 120 x 67 x 196 cm / 165 x 165 x 117 cm 2903 (2 packages): 382 x 202 x 166 cm / 120 x 67 x 196 cm
Compressed air pressure	6 bar		
Minimum air pressure	4,5 bar		

### TECHNICAL SPECIFICATIONS

Strapping width	8 - 12 - 15,5 mm (must be set in Reisopack factory)	Minimum strapping height	130 mm
Strapping thickness	0.63-0.85 mm	Strapping cycle time with 3 straps and application of corners:	51 sec. (without corners: 38 sec.)
Welding system	By electric resistance.		
Adjustable welding temperature and cooling time.			

10/04 Edition - We reserve the right to make any modification without prevention.

Fully automatic  
strapping machine  
with corner applicator



## 2901


### Automatic strapping machine with corner applicator

**Horizontal strapping machine with automatic corner applicator, easy and user-friendly set up. Ready to be built into a complete automatic line.**

- Own technology and manufacture using European components of highest quality.
- Easy memorization of the different heights of strapping by pressing a button when the machine is in the desired position. Possibility of saving 10 different heights in 10 different programs.
- Automatic corner applicator.
- Pressing system in the arch to compact the loads and guide the strap.
- Corner application air system by means of 4 telescopic L-shaped arms, adjustable to the size of the pallet.
- Adjustable tension by means of high-tension clamp system.
- Reisopack model 1900 aluminum strapping head ensures long life of the machine.
- Approximate production of 50 pallets/hour with 4 corner boards and 3 straps.
- Security system with inversion of the motor direction.
- Failure warning lights.

Control panel with touch screen for model 2901 and for the variant models 2904 and 2903.


Failure visualization and selection of languages. Enable to set 10 strapping heights in 10 different programs.

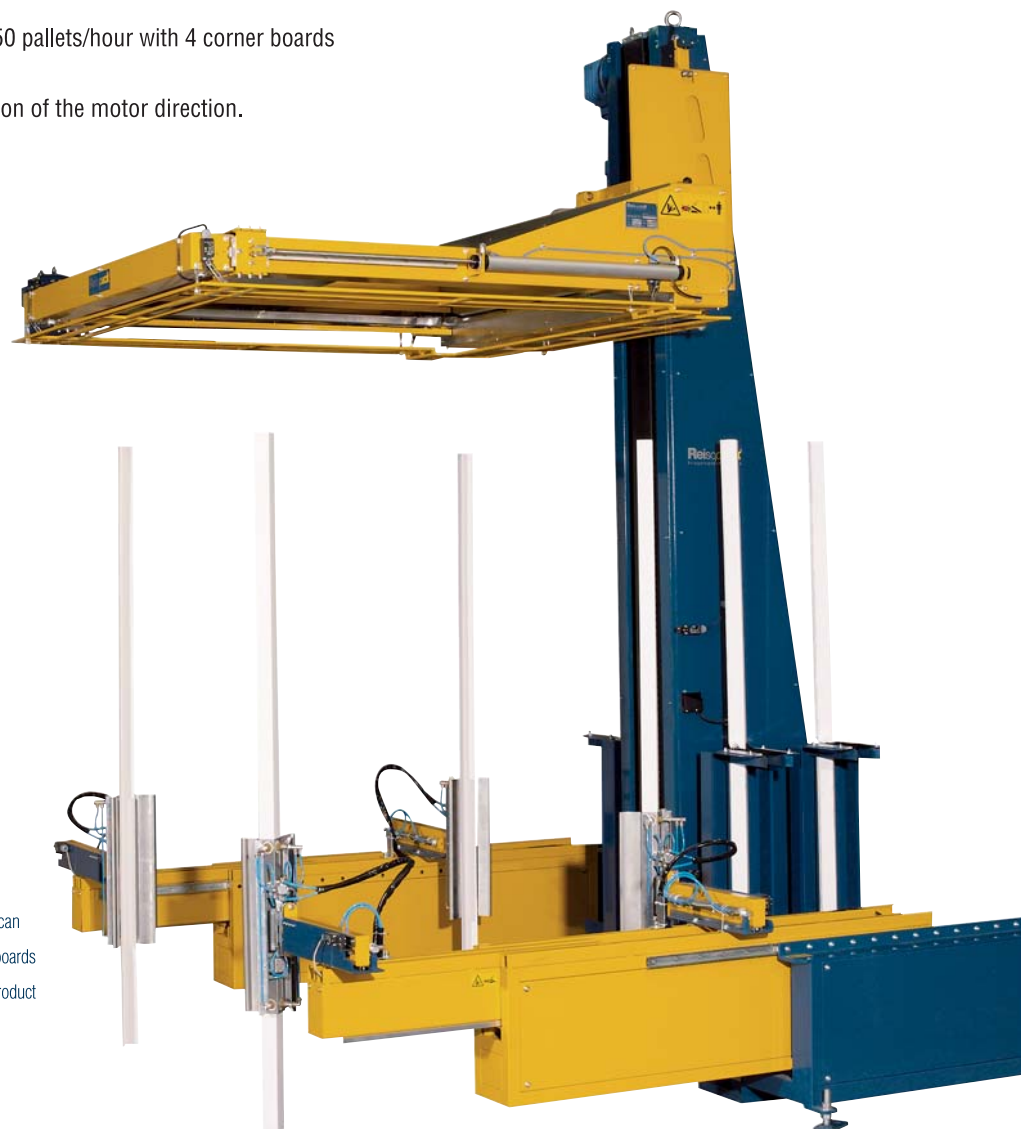

The models 2901-2904 simultaneously can solve the vertical application of the corner boards and the horizontal strapping in palletized product lines.


### Model 2901

The strapping machine 2901 requires that in the entrance position, the shortest side of the pallet should be parallel to the machine.

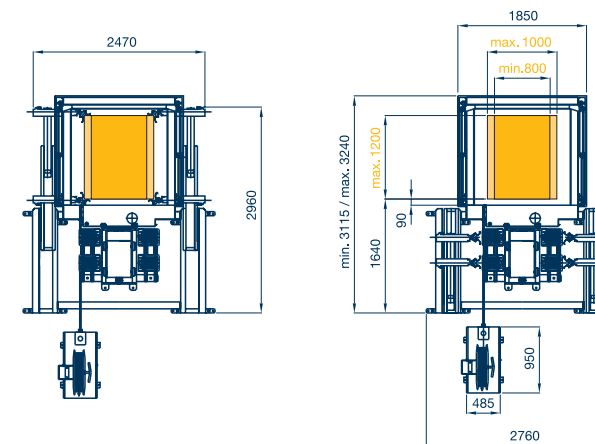

### Variant 2904

The strapping machine 2904 requires that in the entry position, the longest side of the pallet should be parallel to the machine.

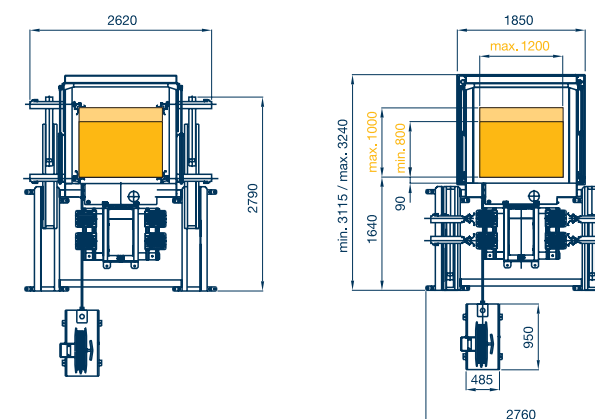

### Variant 2903

The strapping machine 2903 is prepared assemble the corner applicator and enables the entrance of the pallets from both sides.

