

# Reisopack<sup>®</sup>

Horizontal semi-automatic  
Strapping machine for pallets

2830

*Strapping technologies*




The best solution  
for the horizontal  
strapping of the pallets

2830

## Horizontal semi-automatic Strapping machine for pallets

Easy to use. The machine can be placed beside the stacked pallet, avoiding the need to move the load.

- Designed and manufactured using highest quality components.
- Strapping height manually adjustable without effort.
- Allows strapping from 15 cm. from the floor up to 240 cm.
- Tension electronically adjustable through a magnetic clutch to get the strongest tension without any physical effort.
- Cornerboard dispenser.
- Inner diameter of the bobbin holder 200 or 400 mm. (standard 200 mm.)
- Battery: 2 x 6V 175 Amp. special traction battery with high frequency battery charger built into base.
- With changeable batteryset.

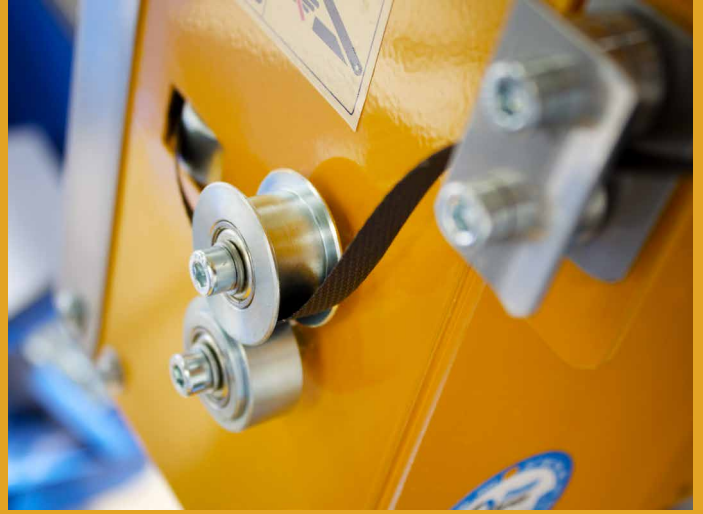

*Brake lever to prevent unwanted movements.*

### Technical specifications

Voltage: 220/240 v 50/60 Hz. Single Phase

Electrical consumption: 0,5 KW

Duration 1 pallet with 4 cornerboards and three straps: 55 sec.

Transport dimensions (LxWxH): 118 x 115 x 200 cm (400 kg.)

Minimale strap height: 150 mm

Maximum strap height: 2400 mm

Changes reserved

2830



Steenks Service bv.

Jan van de Laarweg 1

2678 LH De Lier - Holland

T. +31 (0)174 - 510 266 · F. +31 (0)174 - 518 326

I. [www.steenks-service.com](http://www.steenks-service.com)

E. [info@steenks-service.com](mailto:info@steenks-service.com)